

Parade X-36 RGB




Date: 06.06.2018
Operator: PR

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3230 Parade X-36 RGB Spot sym / Luminaire Data Sheet

Luminous emittance 1:

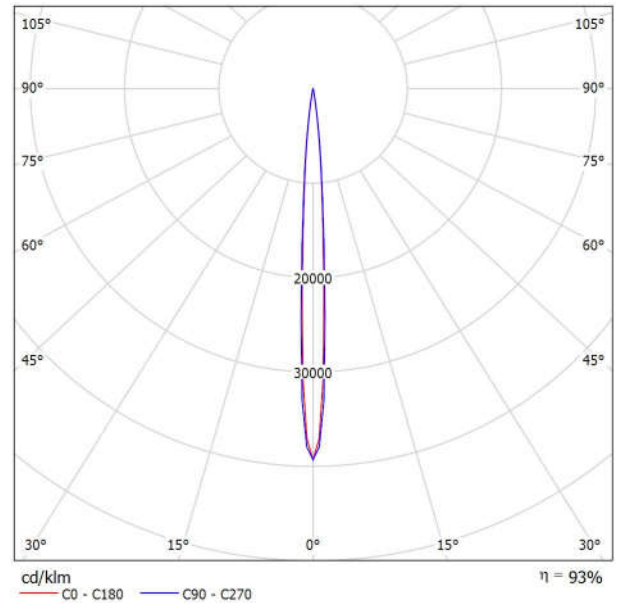

Luminaire classification according to CIE: 100
CIE flux code: 98 99 100 100 94

Griven srl AL3230 Parade X-36 RGB Spot sym
Article No.: AL3230
Luminous flux (Luminaire): 2069 lm
Luminous flux (Lamps): 2214 lm
Luminaire Wattage: 84.0 W
Luminaire classification according to CIE: 100
CIE flux code: 98 99 100 100 94
Fitting: 1 x Cree XPE RGB LEDs (Correction
Factor 1.000).

PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3230 Parade X-36 RGB Spot sym / Cone Diagram

Luminaire: Griven srl AL3230 Parade X-36 RGB Spot sym
Lamps: 1 x Cree XPE RGB LEDs

9.0	1.13	E(0°)		1074
	1.04	E(C90)	3.6°	537
18.0	2.26	E(C0)	3.3°	545
	2.08	E(0°)		268
27.0	3.40	E(C90)	3.6°	134
	3.11	E(C0)	3.3°	136
36.0	4.53	E(0°)		119
	4.15	E(C90)	3.6°	60
45.0	5.66	E(C0)	3.3°	61
	5.19	E(0°)		67
54.0	6.79	E(C90)	3.6°	34
	6.23	E(C0)	3.3°	34

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 6.6°)
- C90 - C270 (Half-value Angle: 7.2°)


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3232 Parade X-36 RGB Narrow sym / Luminaire Data Sheet



Luminous emittance 1:

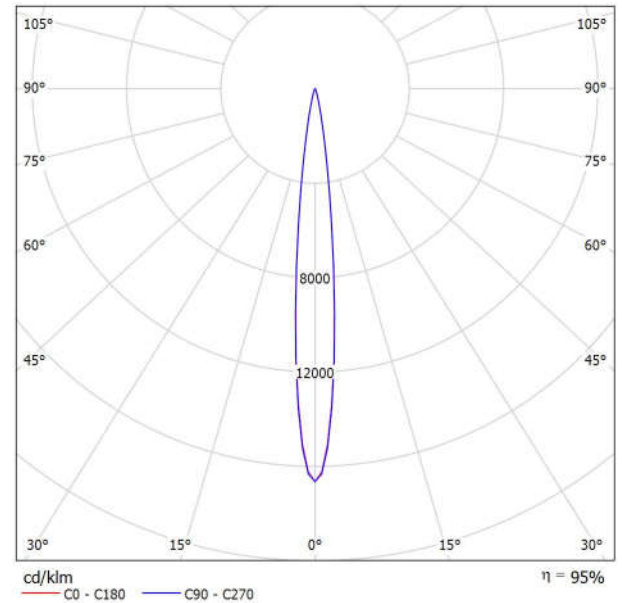

Luminaire classification according to CIE: 100
CIE flux code: 98 99 100 100 96

Griven srl AL3232 Parade X 36 RGB Narrow sym
Article No.: AL3232
Luminous flux (Luminaire): 2063 lm
Luminous flux (Lamps): 2163 lm
Luminaire Wattage: 84.0 W
Luminaire classification according to CIE: 100
CIE flux code: 98 99 100 100 96
Fitting: 1 x Cree XP E RGB LEDs (Correction Factor 1.000).


PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3232 Parade X-36 RGB Narrow sym / Cone Diagram

Luminaire: Griven srl AL3232 Parade X-36 RGB Narrow sym
Lamps: 1 x Cree XP-E RGB LEDs

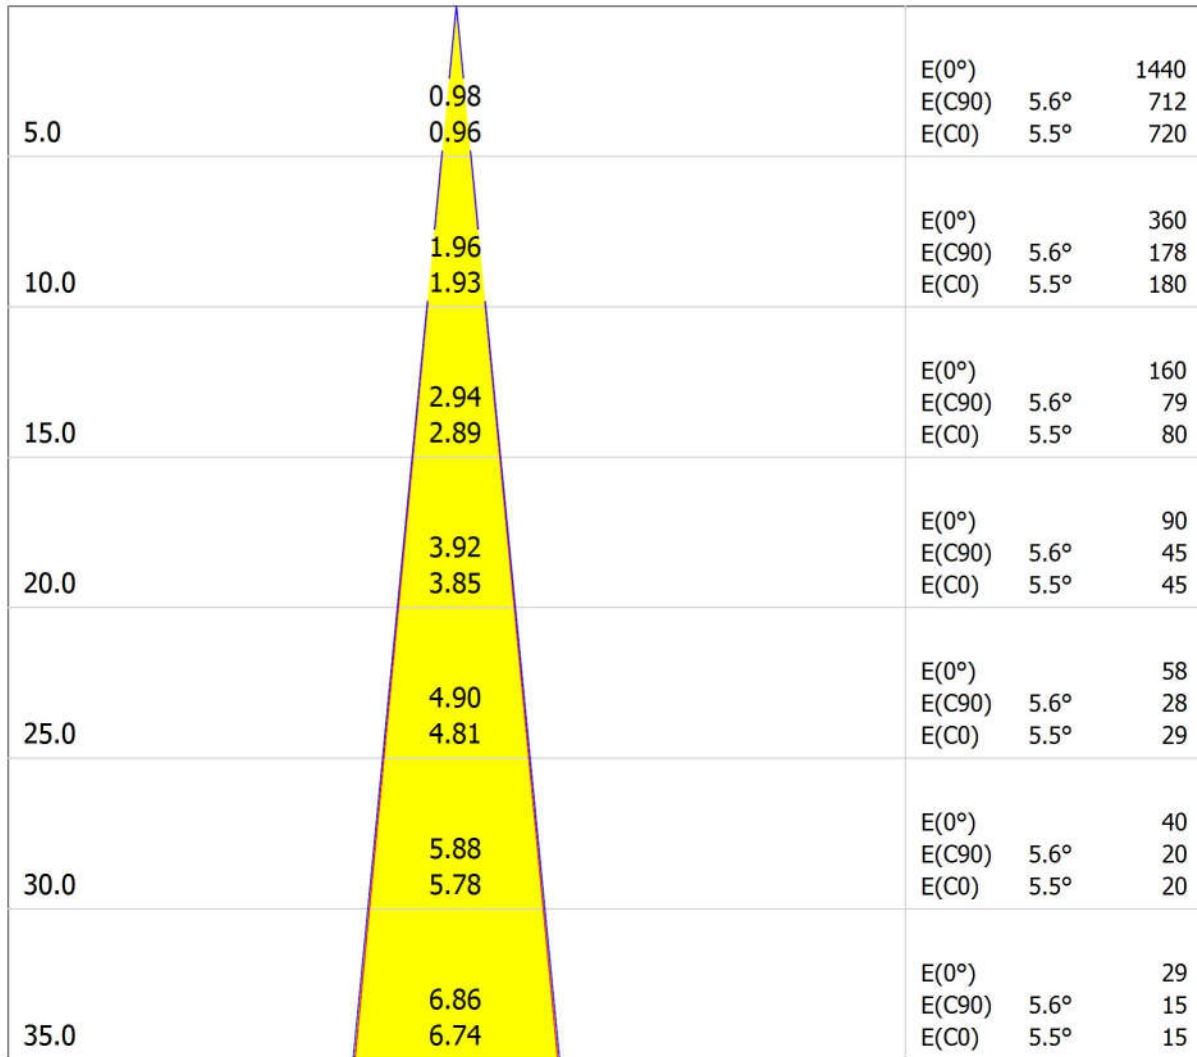

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 11.0°)
- C90 - C270 (Half-value Angle: 11.2°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3234 Parade X-36 RGB Medium sym / Luminaire Data Sheet

Luminous emittance 1:

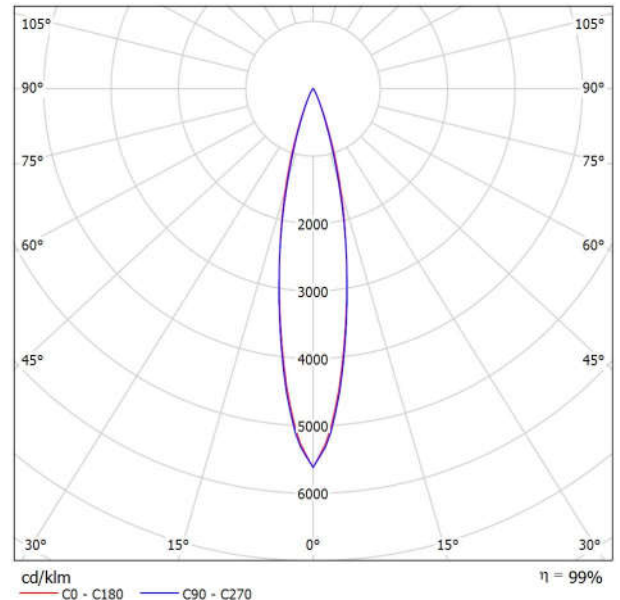

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 99

Griven srl AL3234 Parade X-36 RGB Medium
sym

Article No.: AL3234

Luminous flux (Luminaire): 1962 lm

Luminous flux (Lamps): 1987 lm

Luminaire Wattage: 84.0 W

Luminaire classification according to CIE: 100

CIE flux code: 97 99 100 100 99

Fitting: 1 x Cree XPE RGB LEDs (Correction
Factor 1.000).


PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3234 Parade X-36 RGB Medium sym / Cone Diagram

Luminaire: Griven srl AL3234 Parade X-36 RGB Medium sym
Lamps: 1 x Cree XPE RGB LEDs

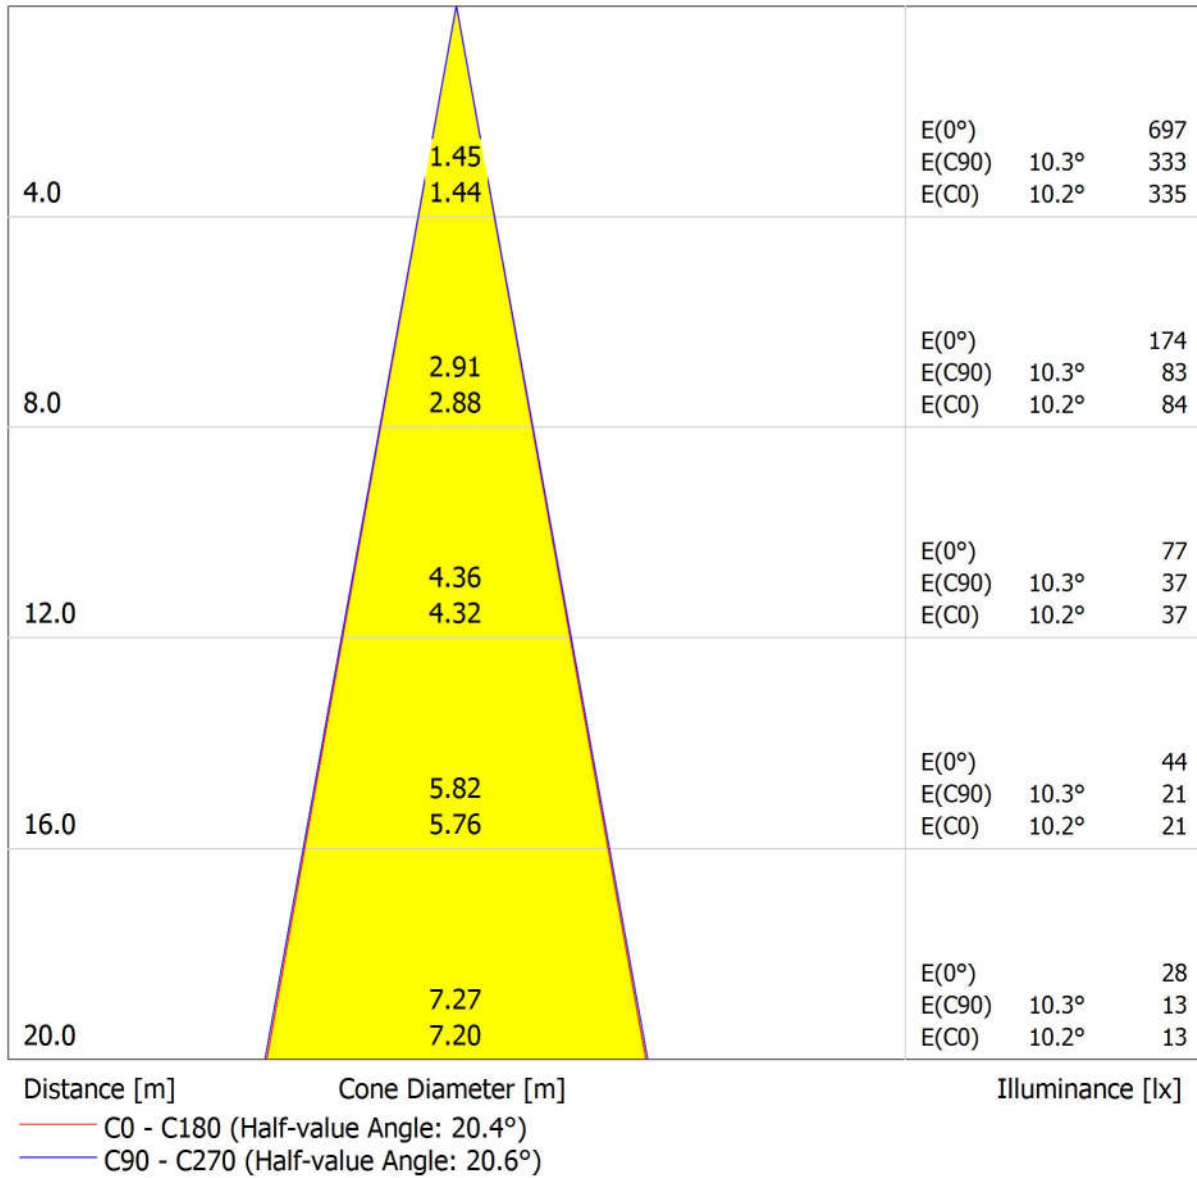


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3236 Parade X-36 RGB Wide sym / Luminaire Data Sheet

Luminous emittance 1:

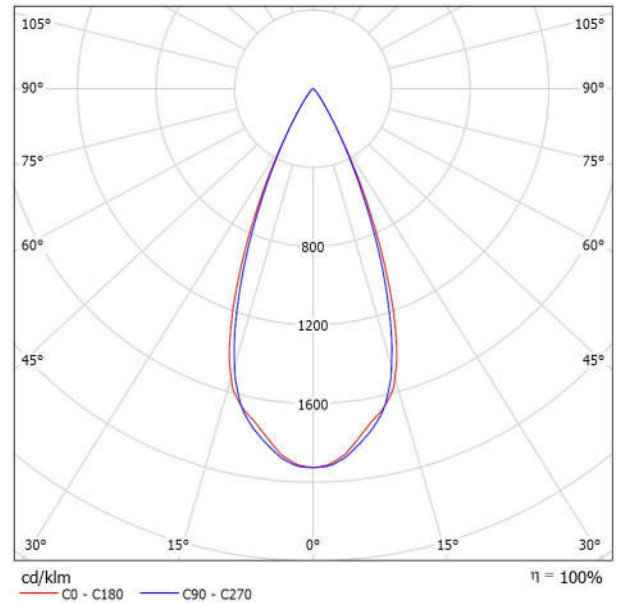

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 100

Griven srl AL3236 Parade X 36 RGB Wide sym
Article No.: AL3236
Luminous flux (Luminaire): 1979 lm
Luminous flux (Lamps): 1974 lm
Luminaire Wattage: 84.0 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 100
Fitting: 1 x Cree XPE RGB LEDs (Correction
Factor 1.000).


PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3236 Parade X-36 RGB Wide sym / Cone Diagram

Luminaire: Griven srl AL3236 Parade X-36 RGB Wide sym
Lamps: 1 x Cree XPE RGB LEDs

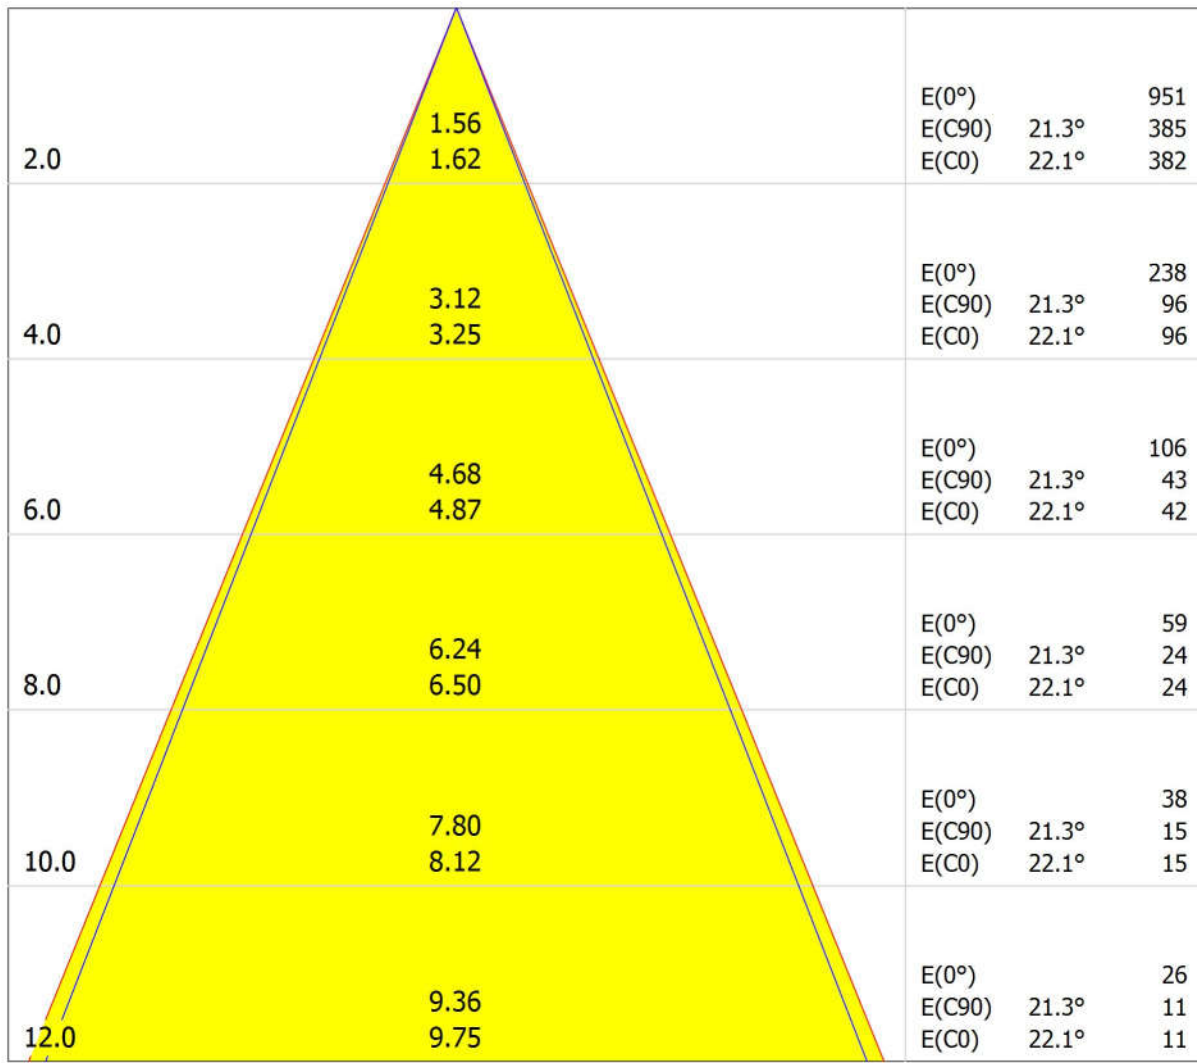

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 44.2°)
- C90 - C270 (Half-value Angle: 42.6°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

GRIVEN srl AL3242 Parade X-36 RGB Extra Wide sym / Luminaire Data Sheet

Luminous emittance 1:

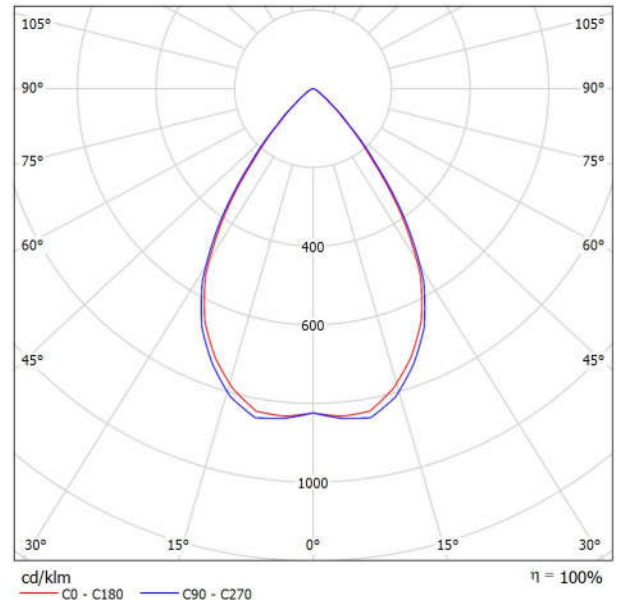

Luminaire classification according to CIE: 100
CIE flux code: 88 99 100 100 100

GRIVEN srl AL3242 Parade X 36 RGB Extra
Wide sym
Article No.: AL3242
Luminous flux (Luminaire): 1823 lm
Luminous flux (Lamps): 1830 lm
Luminaire Wattage: 84.0 W
Luminaire classification according to CIE: 100
CIE flux code: 88 99 100 100 100
Fitting: 1 x Cree XPE RGB LEDs (Correction
Factor 1.000).


PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

GRIVEN srl AL3242 Parade X-36 RGB Extra Wide sym / Cone Diagram

Luminaire: GRIVEN srl AL3242 Parade X-36 RGB Extra Wide sym
Lamps: 1 x Cree XPE RGB LEDs

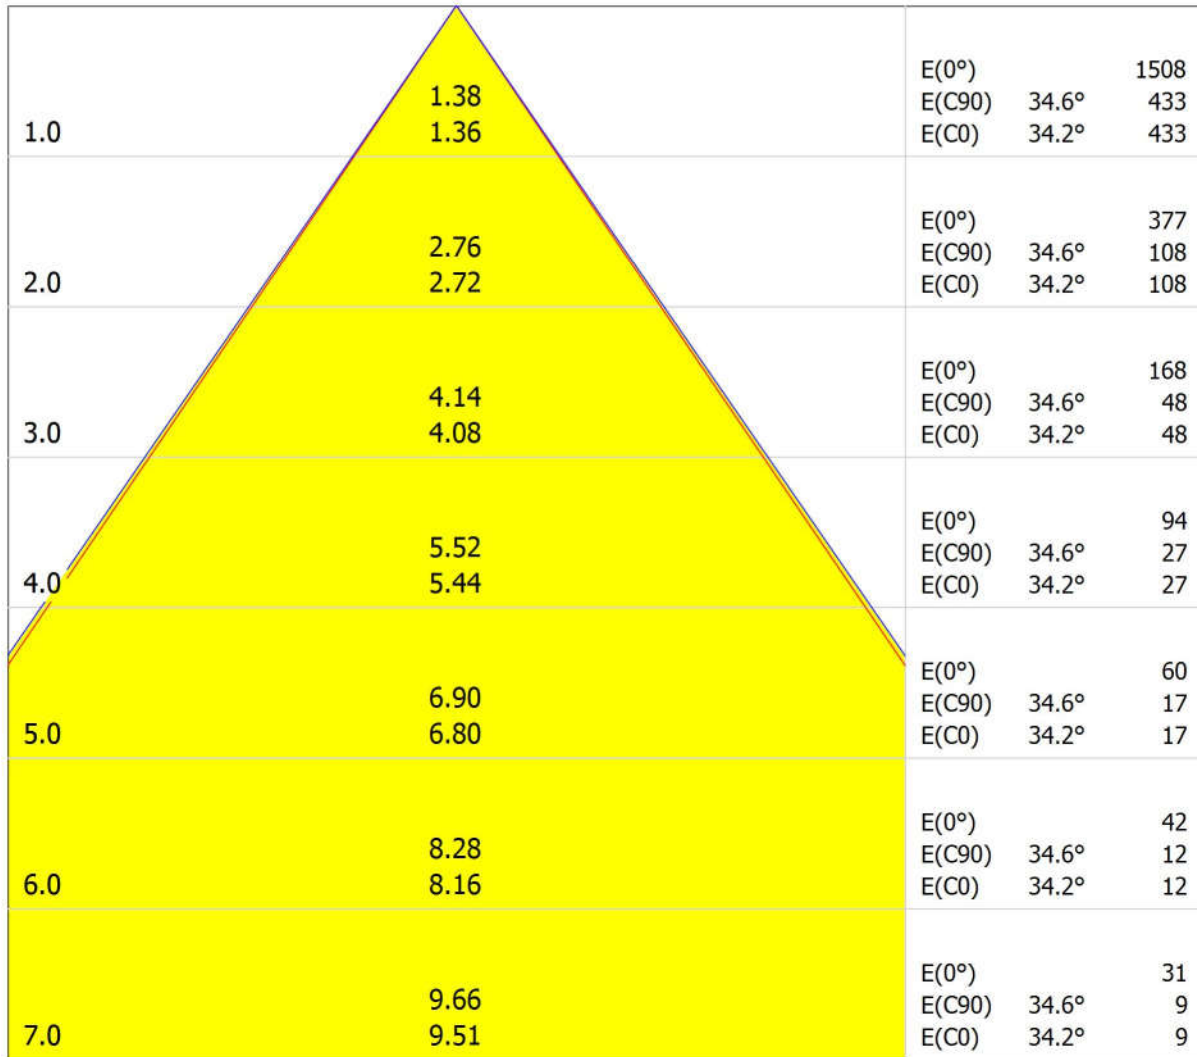

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 68.4°)
- C90 - C270 (Half-value Angle: 69.2°)


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3238 Parade X-36 RGB Elliptical sym / Luminaire Data Sheet



Luminous emittance 1:

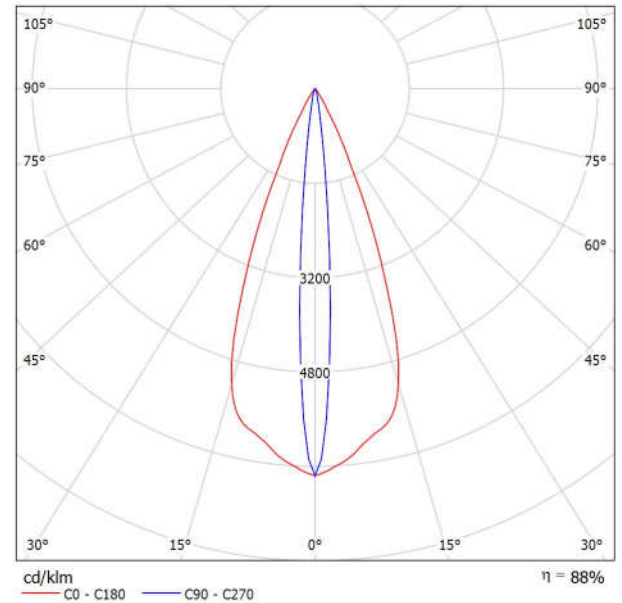

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 88

Griven srl AL3238 Parade X 36 RGB Elliptical sym
Article No.: AL3238
Luminous flux (Luminaire): 1745 lm
Luminous flux (Lamps): 1992 lm
Luminaire Wattage: 84.0 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 88
Fitting: 1 x Cree XP E RGB (Correction Factor 1.000).


PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3238 Parade X-36 RGB Elliptical sym / Cone Diagram

Luminaire: Griven srl AL3238 Parade X-36 RGB Elliptical sym
Lamps: 1 x Cree XP-E RGB

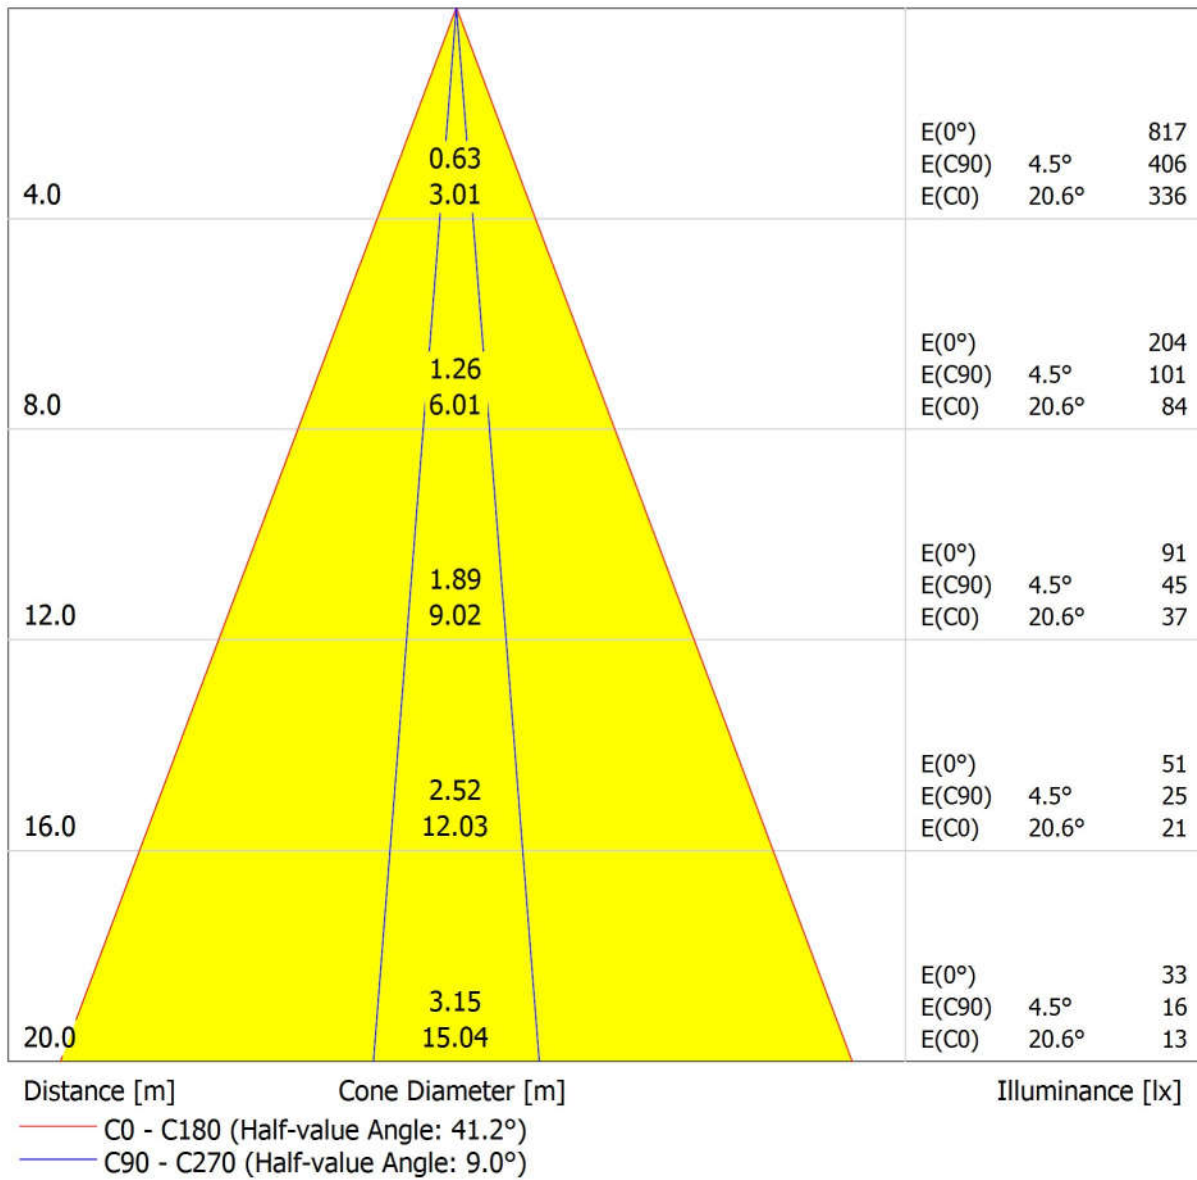


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3240 Parade X-36 RGB Elliptical Wide sym / Luminaire Data Sheet

Luminous emittance 1:

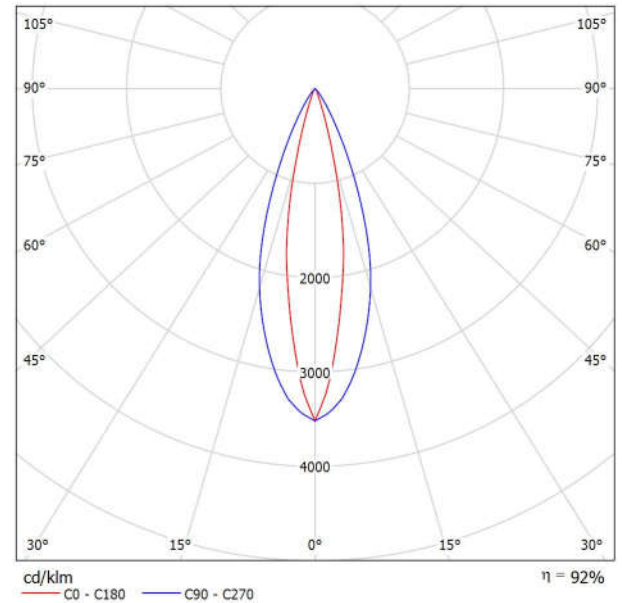

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 92

Griven srl AL3240 Parade X-36 RGB Elliptical
Wide sym
Article No.: AL3240
Luminous flux (Luminaire): 1650 lm
Luminous flux (Lamps): 1793 lm
Luminaire Wattage: 84.0 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 92
Fitting: 1 x Cree XPE RGB LEDs (Correction
Factor 1.000).

PARADE X-RGB-36 is the leading edge high luminance flagship of the linear RGB LED modules by GRIVEN. The unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing light output quality. PARADE X-RGB-36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL3240 Parade X-36 RGB Elliptical Wide sym / Cone Diagram

Luminaire: Griven srl AL3240 Parade X-36 RGB Elliptical Wide sym
Lamps: 1 x Cree XPE RGB LEDs

