

ORPHEO | outdoor use





WALL&CEILING MOUNT LUMINAIRES ORPHEO

ORPHEO R and ORPHEO S are die-cast aluminium wall-mount white light LED diffusers featuring refined cubical and cylindrical silhouettes.

The single or double vertical light shafts (down or up/down) provide linear edge and corner applications with an elegant accent lighting effect that re-defines exterior façades with distinguished and consistent light strokes. The flexible optics range supports an array of design solutions that, combined with the sophisticated light quality of the warm, natural and cool white light colour temperature configurations available, allow for the perfect light plan finishing touch. Featuring IP65 rating and corrosion resistant housing complete with integrated electronic driver for a comfortable set-up and an instant hook up to mains, the ORPHEO series of efficient and durable up-lighters and down-lighters is capable of delivering eye-catching wall grazing effects and turning the neighborhood into a pleasing and stylish urban landscape.

ORPHEO R e ORPHEO S sono appliques a LED dalle sagome cubiche e cilindriche per montaggio a parete utilizzabili in esterni. Disponibili a cono di luce verticale singolo o doppio (down oppure up/down), i modelli della serie ORPHEO esaltano le linee architettoniche dei palazzi con un elegante effetto di illuminazione d'accento.

La selezione di ottiche opzionali e le configurazioni a luce bianca di temperatura colore calda, naturale e fredda garantiscono una vasta gamma di soluzioni progettuali. Corpo in alluminio pressofuso con trattamento resistente alla corrosione, protezione IP65 ed alimentatore elettronico integrato assicurano un'installazione confortevole ed una performance efficiente e duratura in grado soprattutto di valorizzare lo spazio urbano con gusto estetico raffinato.

ORPHEO | outdoor use

TECHNICAL SPECIFICATIONS

9 or 18 high brightness cool, warm or natural white power LEDs unit
 Power supply:
 220÷240V / 50-60 Hz
 Power consumption:
 Single emission 0.08A @ 230V / 16W max
 Double emission 0.15A @ 230V / 34W max
 Electrical class: I
 Self-resetting fuse protection
 Meets CE safety standards
 Extruded and die-cast aluminum housing, corrosion resistant IP65
 Operating temperature:
 -25°C to 40°C (-13°F to 104°F)
 Orpheo R:
 Single emission 2.3 Kg
 Double emission 2.8 Kg
 Orpheo S:
 Single emission 2.9 Kg
 Double emission 3.5 Kg

SPECIFICHE TECNICHE

Faretto con 9 o 18 LED bianco freddo, caldo o naturale
 Alimentazione:
 220÷240V / 50-60 Hz
 Consumo:
 Emissione singola 0,08A @ 230V / 16W max
 Emissione doppia 0,15A @ 230V / 34W max
 Classe elettrica: I
 Fusibile di protezione auto-ripristinante
 Rispetta le norme CE
 Corpo in alluminio estruso con trattamento anti corrosivo IP65
 Temperatura di utilizzo:
 da -25°C a 40°C
 Orpheo R:
 Emissione singola 2,3 Kg
 Emissione doppia 2,8 Kg
 Orpheo S:
 Emissione singola 2,9 Kg
 Emissione doppia 3,5 Kg

WW

CW

NW

CODES / CODICI

AL4160 ORPHEO R SINGLE EMISSION
 AL4162 ORPHEO R DOUBLE EMISSION
 AL4164 ORPHEO S SINGLE EMISSION
 AL4166 ORPHEO S DOUBLE EMISSION

IP65 / CE

CODES EXTENSION / ESTENSIONE CODICI



AL4160	ON	TW
CODE + CODICE	OPTICS + OTTICA	COLOUR TEMPERATURE + TEMPERATURA COLORE

OPTICS / OTTICA

OS Spot / Spot
ON Narrow / Stretta
OM Medium / Media
OW Wide / Larga

COLOUR TEMPERATURE / TEMPERATURA COLORE

TC 6300K Cool white / Bianco freddo
TN 4200K Natural white / Bianco naturale
TW 3000K Warm white / Bianco caldo

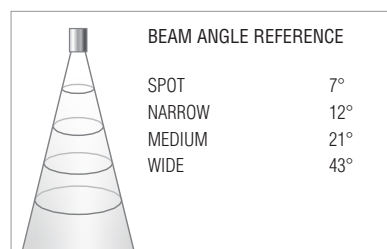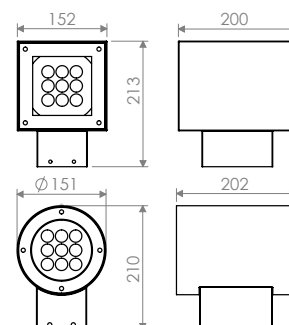

PHOTOMETRIC DETAILS
 AVAILABLE ON OUR WEBSITE
 DATI FOTOMETRICI DISPONIBILI
 SUL NOSTRO SITO



DISCOVERING NEW OUTDOOR DIMENSIONS