



# HALF MOON BOLLARD / SPIKE



## DESCRIPTION

HALF MOON BOLLARD is an extremely compact LED luminaire capable of enhancing outdoor ambiances with discretion and elegance through the creation of refined accent lighting effects in both coloured and white light. Fitted with remote PSU, it highlights architectural or landscape details with extreme precision. Available in three different heights, it alternatively features brass swivel or one-tone finish, and can be fitted with different mounting accessories for a comfortable in-ground placement. The SPIKE version comes with a 10 cm long picket for direct installation in the ground.


## MAIN FEATURES

- Max. delivered lm output: 275 lm / 92 lm/W
- Size: (HxWxD) Bollard Ø 32  
250/750/500x100x50/55 mm / Ø 1.26  
9.84/19.68/29.52x3.93x1.96/ Ø 2.16"  
Spike: Ø 32 80+102x50/55 mm / Ø 1.25  
3.14+4x1.97/ Ø 2.16"
- Control system: DMX-RDM, DALI, ON-OFF, remote wireless data
- Extremely compact bollards specific for the enhancement of essential landscape or architectural details


## LED COLOUR CONFIGURATIONS



# HALF MOON BOLLARD/SPIKE

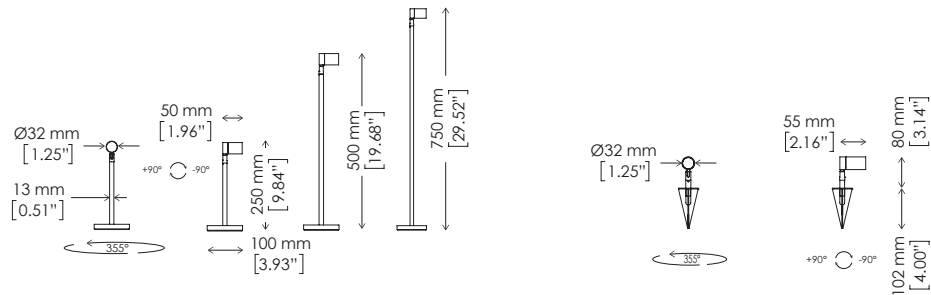

## FEATURES

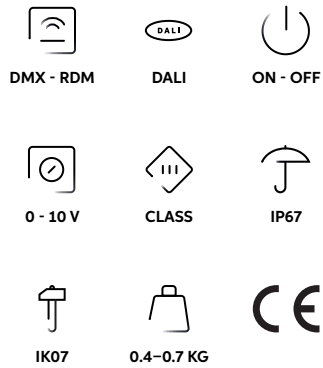

## OPTIONS



## LED COLOUR CONFIGURATIONS



## FINISHES



## MORE INFO

Half Moon Bollard



Half Moon Spike



## CODES

AL5316 HALF MOON BOLLARD  
AL5315 HALF MOON SPIKE

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
HALF MOON BOLLARD RGBW	3.5	32	9
HALF MOON BOLLARD DW	3.5	56	16
HALF MOON BOLLARD W	3	275	92
HALF MOON SPIKE RGBW	3.5	32	9
HALF MOON SPIKE DW	3.5	56	16
HALF MOON SPIKE W	3	275	92

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
OPALINE DIFFUSER	120°	-
NARROW	-	12°
MEDIUM	-	23°
WIDE	-	43°
ELLIPTICAL	-	14°x38°



Italy – Private garden, Mantua