



HALF MOON RECESSED

HALF MOON RECESSED



DESCRIPTION

HALF MOON RECESSED is an extremely compact in-ground LED uplighter delivering a distinctive light output for directive application or decorative lighting patterns creation. Its external PSU and shallow recess depth allow a comfortable installation even in the smallest spaces. It is the perfect solution for functional orientation signalling, and for marking out paths, walkways, entrances or small landscape features in delicate pastel tones or intense white shades.


MAIN FEATURES

- Max. delivered lm output: 229 lm / 92 lm/W
- Max. size: (WxD) \varnothing 51x46 mm / \varnothing 2x1.8"
- Control system: DMX-RDM, DALI, ON-OFF, 0-10V, remote wireless data
- Extremely compact in-ground LED up-lighter for decorative or functional applications available with stainless steel frame or in a flush-mount version


LED COLOUR CONFIGURATIONS




HALF MOON RECESSED

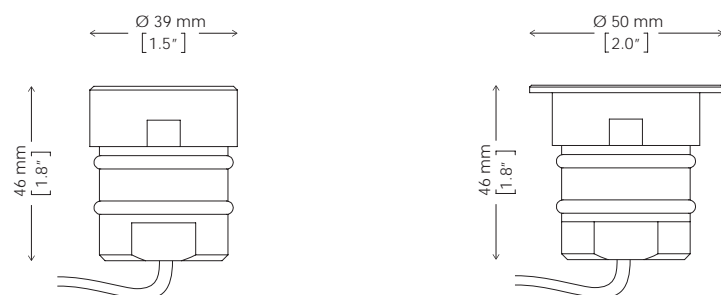

FEATURES

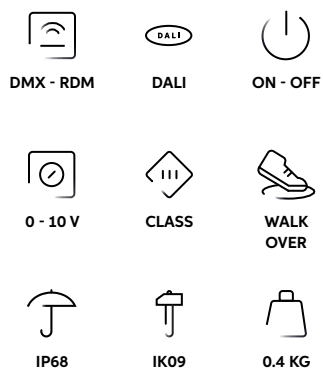

LED COLOUR CONFIGURATIONS

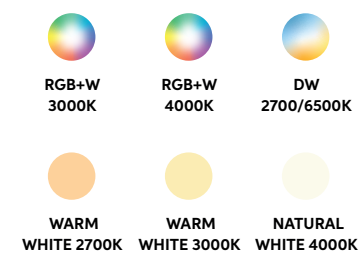

MORE INFO



CODES

AL5317 HALF MOON RECESSED

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
HALF MOON RECESSED RGBW	1.5	14	9
HALF MOON RECESSED DW	1.5	24	16
HALF MOON RECESSED W	2.5	229	92

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
OPALINE DIFFUSER	120°	-
NARROW	-	12°
MEDIUM	-	23°
WIDE	-	43°



Typical product installation