



MINI WATERLED MK3

MINI WATERLED MK3



DESCRIPTION

Small-size fountains and waterfalls, as well as reflecting pools, are the ideal applications for the compact marine-grade MINI WATERLED MK3, now restyled and further optimized. The superior lumens life assisted by the on-board electronic thermal management exceeds the industry standards lifetime. The certified IP68 Class III rating and heavy-duty AISI 316L stainless steel body define the virtually maintenance free performance. DMX-RDM digital control system adds up to the infrared remote control option for an even more comfortable and straightforward fixture management.


MAIN FEATURES

- Max. delivered lm output: 2625 lm / 105 lm/W
- Size: (HxWxD) 232.5x215x89.5 mm / 9.1x8.5x3.5"
- Control system: DMX-RDM
- Compact underwater LED fixture specific for small sized installations in chlorine water and marine environment


LED COLOUR CONFIGURATIONS



MINI WATERLED MK3

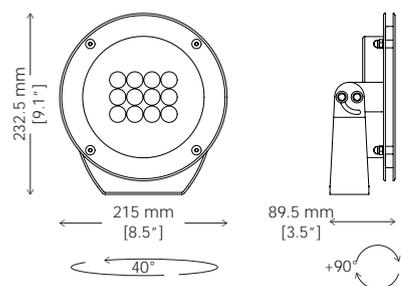

FEATURES



OPTIONS



LED COLOUR CONFIGURATIONS



MORE INFO



CODES

AL8369 MINI WATERLED MK3

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
MINI WATERLED MK3 RGBW	25	779	31
MINI WATERLED MK3 DW	25	1200	48
MINI WATERLED MK3 W	25	2625	105

BEAM ANGLE REFERENCE	RGBW	DW/W
SPOT	8°	12°
NARROW	12°	15°
MEDIUM	23°	25°
WIDE	44°	48°
EXTRA WIDE	59°	61°
ELLIPTICAL	9° x 42°	14° x 39°
ELLIPTICAL WIDE	19° x 39°	23° x 37°
WALL WASH	14° (5° incline) x 37°	19° (5° incline) x 38°



Typical product installation