



# MOLED



## DESCRIPTION

Suitable for applications in pedestrian areas, the MOLED series provides micro-shaped linear solutions for pathway signalling, as well as for smart parks and public spaces enhancement. IP67 rated, this seamless flush-mount, robust and stylish module guarantees enduring exterior performance. Combinations of multiple modules, available in RGB, solid or tunable white and, on request, monochrome versions, can be comfortably set-up with invariable pixel pitch for a uniform visual pattern layout, also with angle installation.


## MAIN FEATURES

- Max. delivered lm output: 25: 32 lm / 50: 64 lm / 3.6 lm/W
- Size: (LxWxD) 506/1006x80x130 mm / 19.9/39.6x3.1x5.1"
- Control system: DMX-RDM, self-addressing, remote wireless data
- Flush-mount recessed linear solutions for functional or decorative enhancement of private or public areas


## LED COLOUR CONFIGURATIONS




# MOLED

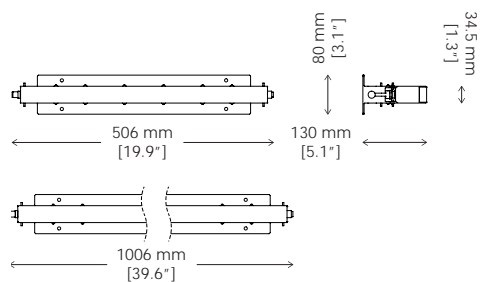

## FEATURES

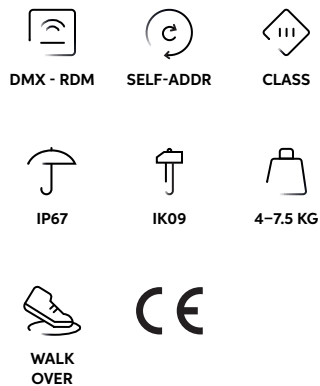

## OPTIONS



## LED COLOUR CONFIGURATIONS



## MORE INFO



## CODES

AL4369 MOLED 25  
AL4370 MOLED 50

PERFORMANCE	WATT	MAX LM	LM/WATT
MOLED 25 RGB	9	21	2.4
MOLED 25 DW	9	30	3.4
MOLED 25 W	9	32	3.6
MOLED 50 RGB	18	43	2.4
MOLED 50 DW	18	61	3.4
MOLED 50 W	18	64	3.6

BEAM ANGLE REFERENCE	RGB	DW/W
OPALINE GLASS	120°	120°



Typical product installation