




HALF MOON DOWNLIGHT

HALF MOON DOWNLIGHT

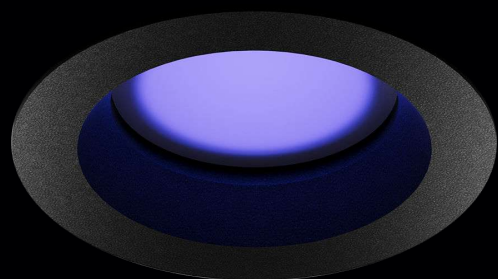

DESCRIPTION

HALF MOON DOWNLIGHT is an extremely compact, ceiling-recessed, dark light LED luminaire that provides a natural and discreet lighting setup for ambient lighting applications. Its external PSU and shallow recess depth allow for comfortable installation even in the smallest spaces. It is the perfect fit for functional or decorative enhancement in delicate pastel tones or intense white shades of entrances, porches, and patios in both hospitality and residential structures. It is available in two configurations, Trim and Trimless, for an appealing flush-mount installation in ceilings, false ceilings, or projecting roofs.


MAIN FEATURES

- Max. delivered lm output: 273 lm / 91 lm/W
- Size: (WxD): \varnothing 50x70 mm / \varnothing 1.97x2.75"
- Control system: DMX-RDM, DALI, ON-OFF, 0-10V with remote PSU, remote wireless data
- Extremely compact ceiling-recessed downlight for decorative or functional illumination available in Trim and Trimless versions


LED COLOUR CONFIGURATIONS



HALF MOON DOWNLIGHT

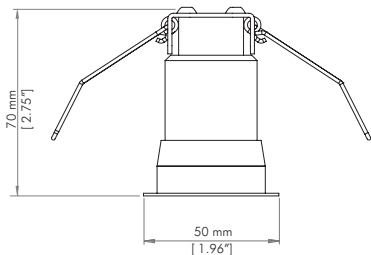

TRIM

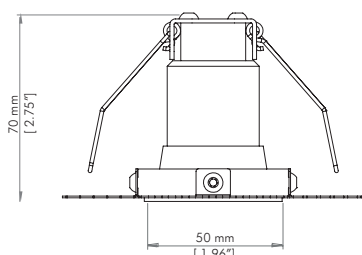

TRIMLESS

FEATURES



DMX - RDM

DALI

ON - OFF



0 - 10 V

IP66

IK10



CLASS

UGR < 19

0.2 KG



OPTIONS



ANTI-SALINE

BEEHIVE
FILTER

PRISMATIC
GLASS



ETL PENDING

LED COLOUR CONFIGURATIONS



RGB+W
3000K

RGB+W
4000K

DW
2700/6500K



WARM
WHITE 2200K

WARM
WHITE 2700K

WARM
WHITE 3000K

NATURAL
WHITE 4000K

MORE INFO AVAILABLE ON OUR WEBSITE


CODES

AL5319 T HALF MOON DOWNLIGHT TRIM

AL5319 S HALF MOON DOWNLIGHT TRIMLESS

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
HALF MOON DOWNLIGHT RGBW	2	18	9
HALF MOON DOWNLIGHT DW	2	32	16
HALF MOON DOWNLIGHT W	3	273	91

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
OPALINE DIFFUSER	120°	–
NARROW	–	12°
MEDIUM	–	23°
WIDE	–	43°
ELLIPTICAL	–	14° x 38°

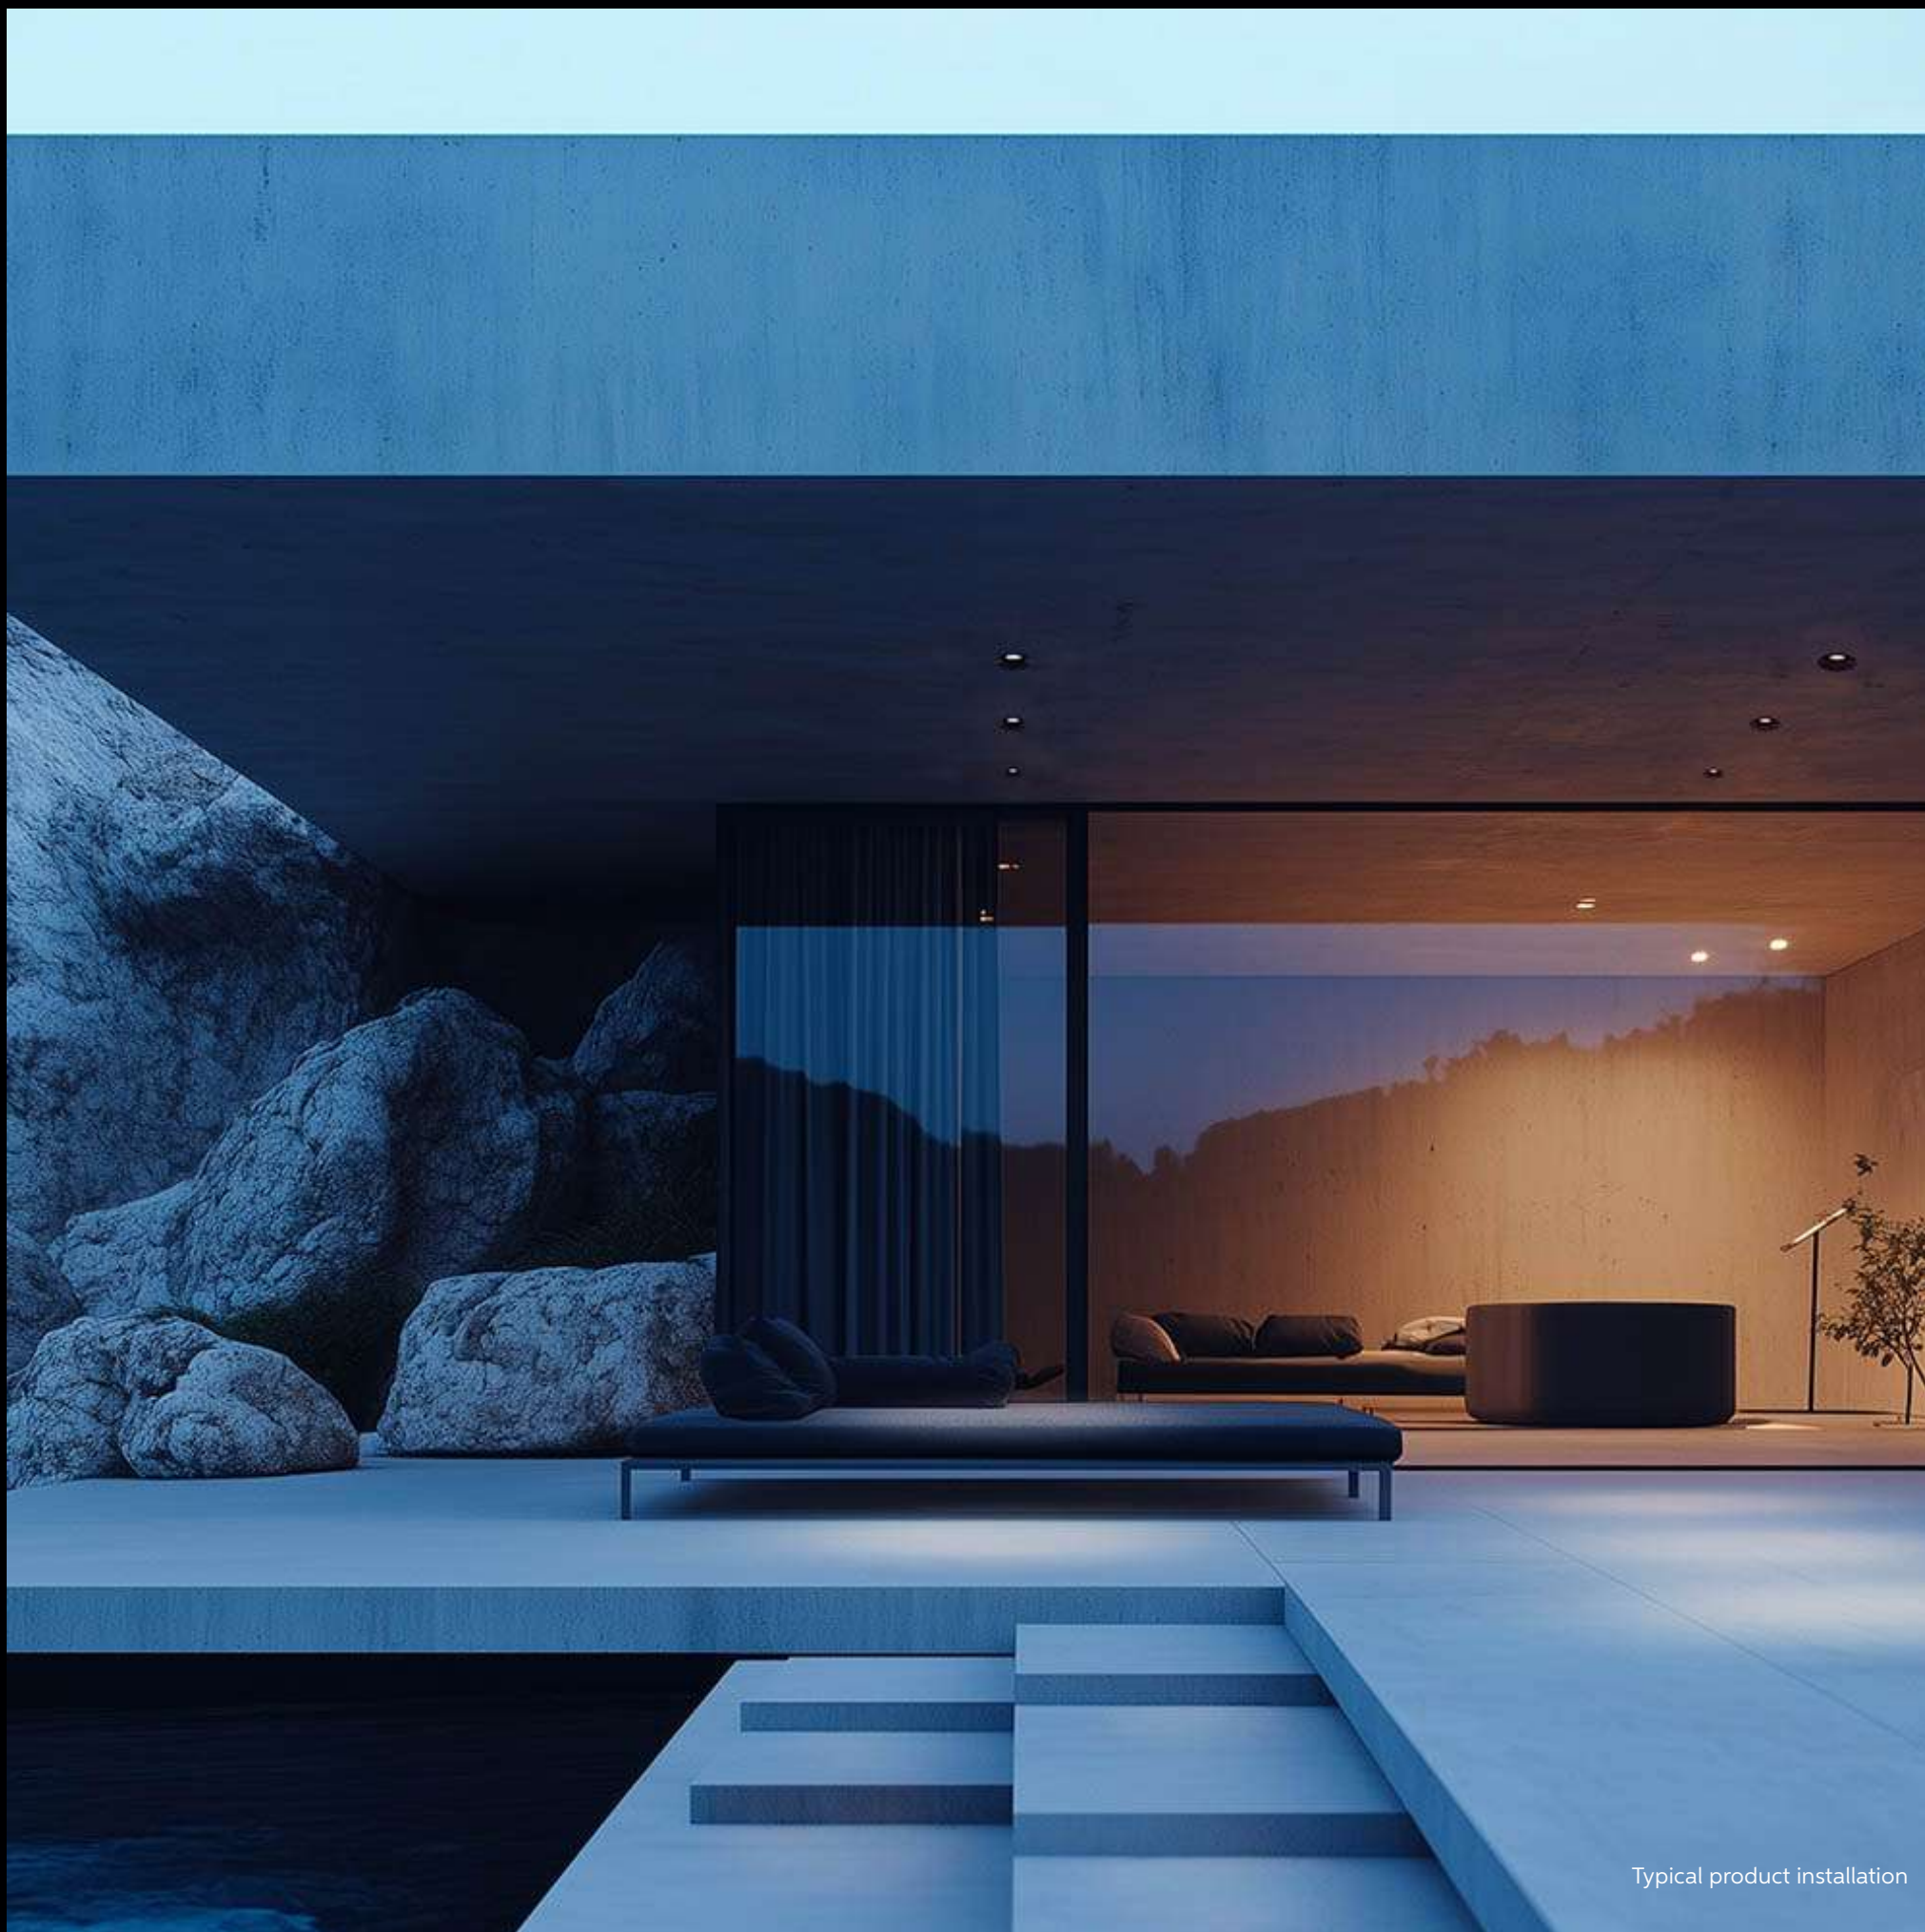

Typical product installation