



PARADE L



DESCRIPTION

Available in four different lengths, PARADE L features an impressive luminous flux with real uniform colour coverage even on close-up installations. These flexible linear bars are specific for truly powerful wall grazing enhancement of large-scale façades or architectural elements. Featuring one-foot-long independent pixel clusters, the alternative independent pixel version delivers dynamic visual concepts on large-scale architectural spaces, where video, animation or graphic patterns can be displayed to generate an eye-catching lighting show. The new solid white light DALI/ON-OFF release is the ideal solution for those applications which do not require RDM/DMX functions.


MAIN FEATURES

- Max. delivered lm output: 1: 2221 lm / 2: 4424 lm / 3: 6620 lm / 4: 8863 lm / 114 lm/W max.
- Size: (HxWxD) 318/610/914/1219x70x76 mm / 12.5/24/36/48x2.7x3"
- Control system: DMX-RDM, DALI DT8, DALI, ON-OFF, self-addressing, independent pixel, remote wireless data
- Linear modules specific for powerful wall grazing enhancement of large-scale façades or architectural elements


LED COLOUR CONFIGURATIONS




PARADE L

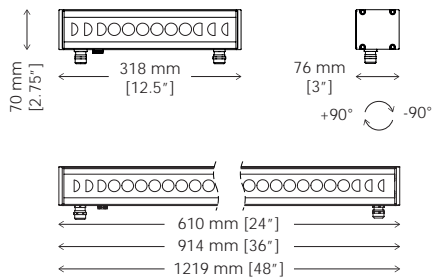

FEATURES

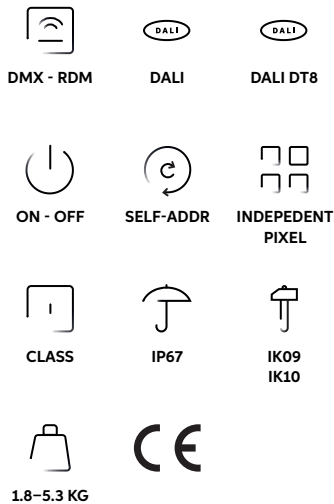


OPTIONS



LED COLOUR CONFIGURATIONS



FINISHES



MORE INFO



CODES

AL5060 PARADE L 1
 AL5061 PARADE L 1 POLAR EDITION
 AL5260 PARADE LB 1
 AL5065 PARADE L 2
 AL5066 PARADE L 2 POLAR EDITION
 AL5265 PARADE LB 2
 AL5070 PARADE L 3
 AL5071 PARADE L 3 POLAR EDITION
 AL5270 PARADE LB 3
 AL5075 PARADE L 4
 AL5076 PARADE L 4 POLAR EDITION

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
PARADE L 1 RGBW	20	917	46
PARADE L 1 DW	19	2221	117
PARADE L 1 W	19	2101	111
PARADE LB 1 W	20	2212	111
PARADE L 2 RGBW	38	2087	55
PARADE L 2 DW	38	4220	111
PARADE L 2 W	38	4203	111
PARADE LB 2 W	39	4424	111
PARADE L 3 RGBW	58	2538	44
PARADE L 3 DW	56	6620	111
PARADE L 3 W	56	6620	111
PARADE LB 3 W	57	6442	111
PARADE L 4 RGBW	78	3468	44
PARADE L 4 DW	76	8863	114
PARADE L 4 W	76	8295	111

BEAM ANGLE REFERENCE	RGBW	DW/W
SPOT	9°	12°
NARROW	11°	15°
MEDIUM	26°	25°
WIDE	43°	48°
EXTRA WIDE	60°	59°
ELLIPTICAL	12° x 42°	14° x 39°
ELLIPTICAL WIDE	25° x 45°	23° x 37°
WALL WASH	13° (5° incline) x 37°	19° (5° incline) x 38°



Vietnam – Dam Vac Bridge, Vinh Yen