



RUBY MC R



DESCRIPTION

Featuring shallow recessed depth for a comfortable in-ground installation, RUBY MC R is a highly performing uplighter specifically designed for exterior recessed applications. Responding to aesthetic appeal and chromatic adaptability criteria, it features multichip LEDs, which enhance seamless light distribution and smooth colour transitioning in both coloured and tunable white light. This compact IP67 rated light fitting allows a 2000 Kg deadweight load capacity that makes it suitable for ground mounting applications even in vehicular areas.


MAIN FEATURES

- Max. delivered lm output: 3896 lm / 74 lm/W
- Size: (WxD) \varnothing 280x153 mm / \varnothing 11x6"
- Control system: DMX-RDM, remote wireless data
- Drive-over multichip LED uplighter featuring shallow recessed depth


LED COLOUR CONFIGURATIONS



RUBY MC R

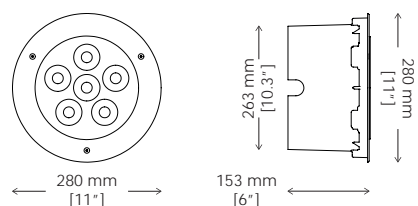

FEATURES

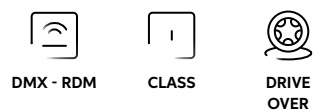

DMX - RDM

CLASS

DRIVE
OVER



2000 KG
MAX LOAD

IP67

IK09



4.9 KG

CE

OPTIONS



POLAR

REMOTE
WIRELESS DATA

ANTI-SLIP



ETL
PENDING

LED COLOUR CONFIGURATIONS




RGB+W
3000K

RGB+W
4000K

DW
3000/6500K

MORE INFO

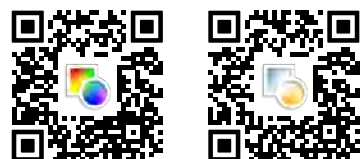

CODES

AL5248 RUBY MC R

| PERFORMANCE | WATT | MAX LM OUTPUT | LM/WATT |
|----------------|------|------------------|---------|
| RUBY MC R RGBW | 53 | 2292 | 43 |
| RUBY MC R DW | 53 | 3896 | 74 |

| BEAM ANGLE REFERENCE | RGBW/DW |
|-------------------------|---------|
| SPOT | 7° |
| NARROW | 10° |
| MEDIUM | 25° |
| WIDE | 36° |



Ireland – Phoenix Column, Dublin