



RUBY R



DESCRIPTION

Specifically designed for exterior recessed applications, RUBY R is a highly performing LED uplighter featuring shallow recessed depth for a comfortable in-ground installation. Delivering spot lighting and wall grazing effects of great emotional impact in both coloured and white light, it ensures a 2000 Kg deadweight load capacity, which makes it suitable even for vehicular areas.


MAIN FEATURES

- Max. delivered lm output: 3769 lm / 102 lm/W
- Size: (WxD) \varnothing 280x153 mm / \varnothing 11x6"
- Control system: DMX-RDM, remote wireless data
- Drive-over uplighter featuring shallow recessed depth


LED COLOUR CONFIGURATIONS



RUBY R

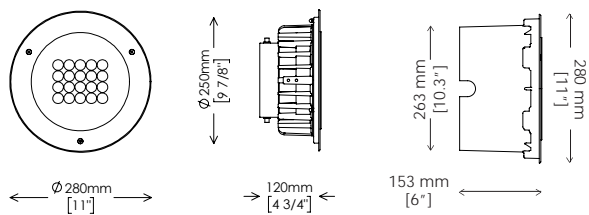

FEATURES

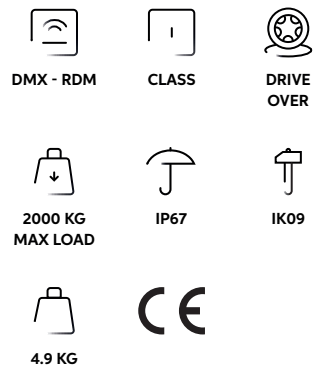

OPTIONS



LED COLOUR CONFIGURATIONS



MORE INFO



CODES

AL4992 RUBY R

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
RUBY R RGBW	36	1581	44
RUBY R DW	36	3667	102
RUBY R W	36	3554	99

BEAM ANGLE REFERENCE	RGBW	DW/W
SPOT	7°	12°
NARROW	11°	15°
MEDIUM	21°	25°
WIDE	43°	47°
EXTRA WIDE	69°	61°
ELLIPTICAL	9° x 41°	14° x 39°
ELLIPTICAL WIDE	20° x 38°	23° x 37°
WALL WASH	14° (16° incline) x 37°	24° (16° incline) x 63°



Russia – Russian Copper Company, Ekaterinburg