



CHIRON RECESSED

CHIRON RECESSED



DESCRIPTION

CHIRON RECESSED is a high-efficiency in-ground LED module featuring a very compact and slim housing for a comfortable installation in narrow or remote spaces or in pedestrian areas. Owing to a wide optics portfolio, it allows wall grazing, flood lighting or accent lighting effects in different colours and white light temperatures with a surprising light output. It is the right fit for general façade lighting of historical or modern buildings, urban structures as well as residential and hotel complexes. Beside the traditional release with a larger walk-over flange, a discreet and elegant flush-mount full-glass version is also available.


MAIN FEATURES

- Max. delivered lm output: 2: 2510 lm / 3: 3465 lm / 4: 4481 lm / 90 lm/W
- Max. size: (LxWxD) 655/967/1279x70x83 mm / 25.8/38.1/50.4x2.8x1.18"
- Control system: DMX-RDM, DALI, ON-OFF, 0-10V
- High-efficiency in-ground LED module featuring a very compact and slim chassis

LED COLOUR CONFIGURATIONS




CHIRON RECESSED

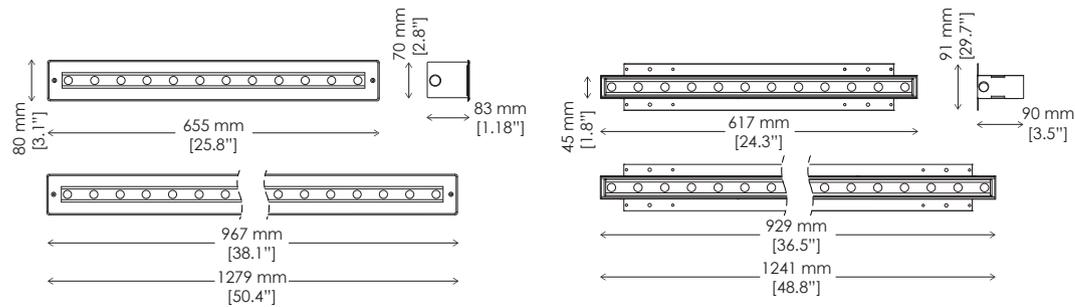

FRAME

ALL-GLASS

FEATURES

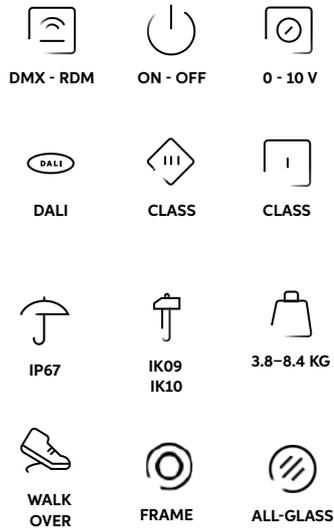

OPTIONS



LED COLOUR CONFIGURATIONS



MORE INFO AVAILABLE ON OUR WEBSITE

CODES

RGBW/DW

AL8389 F CHIRON 2 RECESSED FRAME
AL8389 G CHIRON 2 RECESSED ALL-GLASS
AL8390 F CHIRON 3 RECESSED FRAME
AL8390 G CHIRON 3 RECESSED ALL-GLASS
AL8391 F CHIRON 4 RECESSED FRAME
AL8391 G CHIRON 4 RECESSED ALL-GLASS

WHITE LIGHT

AL8383 F CHIRON 2 B RECESSED FRAME
AL8383 G CHIRON 2 B RECESSED ALL-GLASS
AL8384 F CHIRON 3 B RECESSED FRAME
AL8384 G CHIRON 3 B RECESSED ALL-GLASS
AL8385 F CHIRON 4 B RECESSED FRAME
AL8385 G CHIRON 4 B RECESSED ALL-GLASS

PERFORMANCE	WATT	MAX LM	LM/WATT
CHIRON			
CHIRON 2 REC RGBW	28	1355	48
CHIRON 2 REC DW	28	2510	90
CHIRON 3 REC RGBW	40	1887	48
CHIRON 3 REC DW	40	3495	90
CHIRON 4 REC RGBW	50	2420	48
CHIRON 4 REC DW	50	4481	90
CHIRON B			
CHIRON 2 B REC W	23	2144	93
CHIRON 3 B REC W	34	3216	95
CHIRON 4 B REC W	45	4288	95

BEAM ANGLE REFERENCE	RGBW/DW	W
SPOT	-	16°
NARROW	15°	20°
MEDIUM	34°	30°
WIDE	62°	48°
EXTRA WIDE	77°	60°
ELLIPTICAL 1	53° x 10°	18° x 38°
ELLIPTICAL 2	62° x 42°	-
ELLIPTICAL 3	67° x 26°	-
WALL WASH	30° x 19° incl.2°	24° x 32°



Typical product installation